




Noodoe EV A7n

Home EV Charging

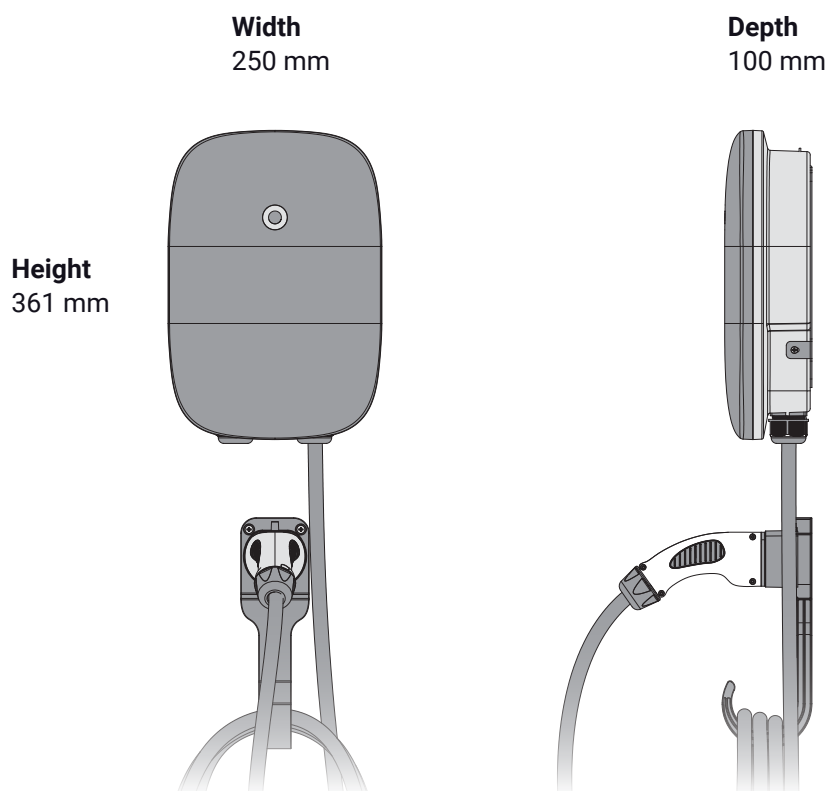

SPECIFICATIONS

Cloud service	Noodoe EV OS
Maximum output power	7 kW
Output power	32 A @230 Vac, 1-phase
Vehicle connector	IEC 62196-2 Type 2
Charging cable length	5 m
Input power	1-phase, 3-wire, 230 Vac, 32 A maximum
Grounding system	TN, TT
Efficiency	> 99%
Power factor	> 0.99
Display	LED indicator
Ingress protection(IP)	IP54
Impact protection	IK08
Electrical protection	Over voltage protection, under voltage protection, surge protection, ground fault protection, residual current device (Type A+DC 6 mA), short circuit protection, over current protection, over temperature protection
Operating temperature	-30 °C to +50 °C
Dimensions	250 (W) x 361 (H) x 100 (D) mm
Weight	4.6 kg
Certifications	CE

Noodoe EV OS



Noodoe Corp.
 15F, No.19-13,
 Sanchong Road,
 Nangang District,
 Taipei City 11501,
 Taiwan
 +886 2 7722 0677
 info@noodoe.com
 noodoe.com