




Noodoe EV AC22J

Smart EV Charging

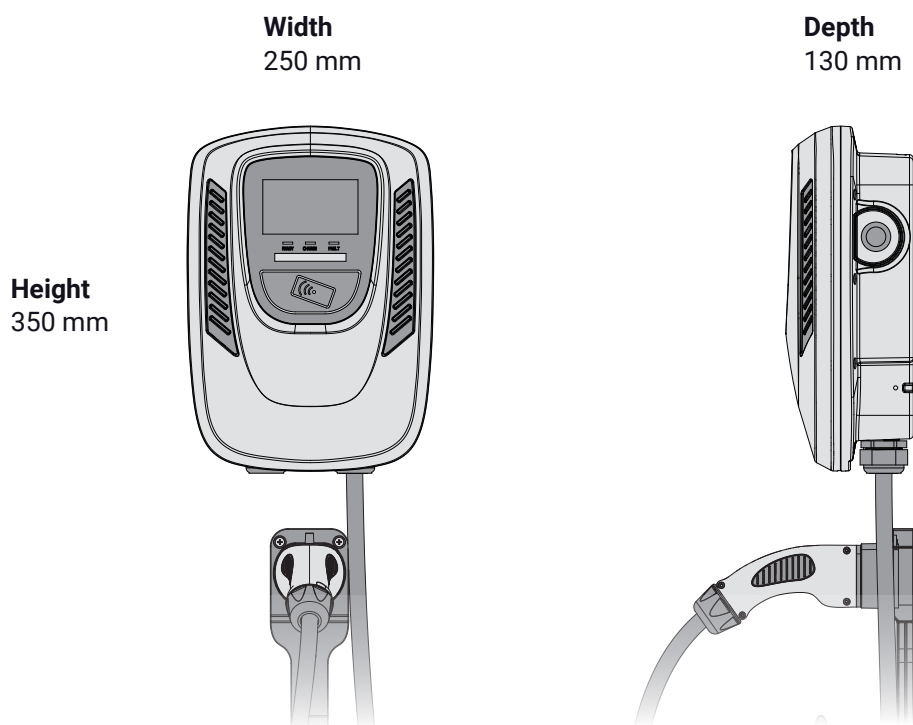

SPECIFICATIONS

Cloud service	Noodoe EV OS
Output power	32 A @ 400 Vac, 3-phase Up to 22 kW
Vehicle connector	IEC 62196-2 Type 2
Charging cable length	16.4 feet / 5 m
Input power	3-phase, 5-wire, 400 Vac, 32 A maximum
Grounding system	TN, TT
Efficiency	> 99%
Power factor	> 0.99
Display	4.3 inch LCD
Communication protocol	OCPP 1.6 JSON
Network connectivity	Ethernet, Wi-Fi
RFID	RFID ISO/IEC 14443 A/B
Ingress protection(IP)	IP65
Electrical protection	Over voltage protection, under voltage protection, surge protection, ground fault protection, residual current device (Type A+DC 6mA), short circuit protection, over current protection, over temperature protection
Operating temperature	-22 °F to +122 °F / -30 °C to +50 °C
Dimensions	250 (W) x 130 (D) x 350 (H) mm
Weight	15 lbs / 6.8 kg
Certifications	CE

Noodoe EV OS



Noodoe Inc.
9351 Irvine Blvd
Irvine, CA 92618
+1 909-468-1118
info@noodoe.com
noodoe.com